


PART NO.		PT-4000-146LP	
REV	DESCRIPTION	DWN	DATE
A	PART NUMBER CHANGED	CZS	01/10/17
		APPROVED	JDMc

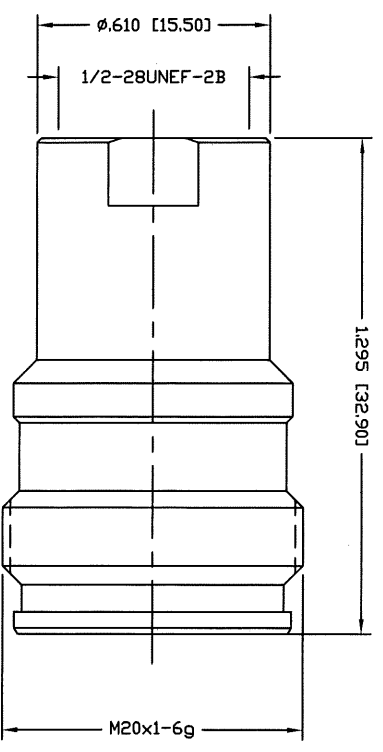

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-3 GHz
 VSWR: <1.15
 DIELECTRIC WITHSTANDING VOLTAGE: 750V/AC
 INSULATION RESISTANCE: 5K M Ohms
 TEMPERATURE RANGE: -40°C TO 155°C
 MECHANICAL DURABILITY: 500 CYCLES

#	DESCRIPTION	QTY	MATERIAL	FINISH
5	GROUND RING	1	BRASS	WHITE BRONZE
4	SPACER	1	PTFE	
3	CONTACT	1	BeCu	SILVER
2	INSULATOR	1	PTFE	
1	BODY	1	BRASS	WHITE BRONZE

CUSTOMER OUTLINE DRAWING
 ALL DIMENSIONS ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN: C. ZUNIGA
 CHECKED: [Signature]
 TO: [Signature]
 DATE: 06/14/16

ROHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RF Connectors
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6340 FAX (858) 549-6345

7610 MIRAMAR RD.
 SAN DIEGO, CA 92126

UNIDAPT TO 4.3-10 JACK ADAPTER

SIZE: A
 CABLE GROUP: N/A
 DWG NO.: **PT-4000-146LP**
 SCALE: NTS
 ENGINEERING ID: 000000

REV: A

SHEET 1 OF 1