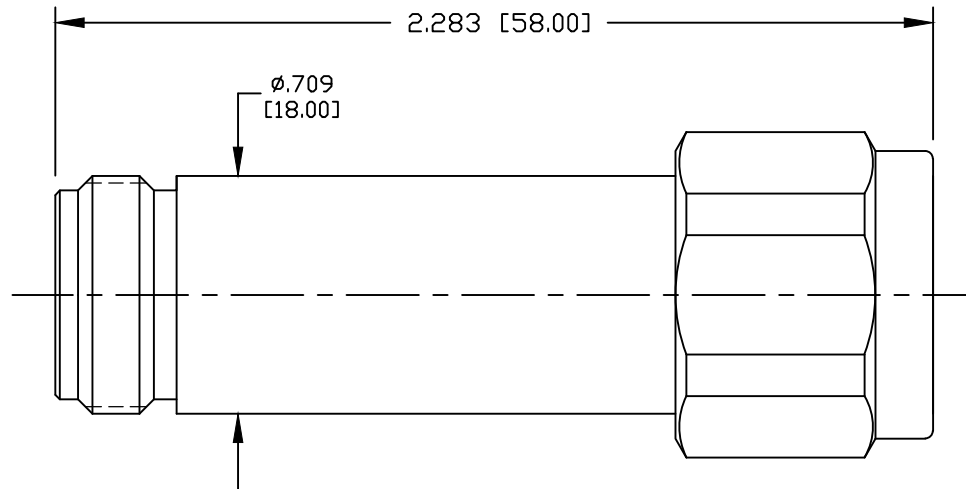


PART NO.

RF-ATN-NMF-5W20

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	10/10/18	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 OHMS
 FREQUENCY RANGE: 0-3 GHz
 POWER: 5 WATT (AVERAGE)
 VSWR MAX: $\leq 1.2:1$
 ATTENUATION: 20dB
 ACCURACY: ± 1.5 dB
 OPERATING TEMPERATURE: -30°C TO $+65^{\circ}\text{C}$

NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING		RoHS COMPLIANT		RFconnectors DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
ALL DIMENSIONS ARE REFERENCE ONLY		PROPRIETARY AND CONFIDENTIAL		5 WATT ATTENUATOR N MALE TO N FEMALE 20dB			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		SIZE A	CABLE GROUP	DWG NO. RF-ATN-NMF-5W20	REVISION —
DRAWN C. ZUNIGA	10/10/18			SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	
CHECKED							
ORJ DRAWN C. ZUNIGA	10/10/18						