
PAR	PART NO. RF-ATN-SMF-5W3							
REV	DESCRIPTION	DWN	DATE	APPROVED				
_	ENGINEERING RELEASE	CZS	10/10/18	JDMc				

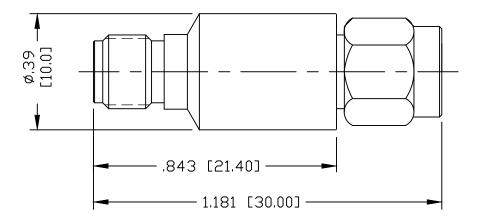

## **SPECIFICATIONS:**

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-3 GHz POWER: 5 WATT (AVERAGE)

VSWR MAX: ≤1.2:1 ATTENUATION: 3dB ACCURACY: ±0.8dB

OPERATING TEMPERATURE: -30°C TO +65°C

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

### CUSTOMER OUTLINE DRAWING ALL DIMENSIONS

ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN C. ZUNIGA	10/10/18
CHECKED	
orj drawn C. ZUNIGA	10/10/18

### PROPRIETARY AND CONFIDENTIAL

THIS DRAVING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAVING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES, ANY VOILLATION IS
PUNISHABLE UNDER U.S.
COPPERIGHT LAWS. COPYRIGHT LAWS.



7610 MIRAMAR RD. SAN DIEGO, CA 92126

# **5 WATT ATTENUATOR** SMA MALE TO SMA FEMALE 3dB

	SIZE CABLE GROUP			DWG NO.	REVISION	
1	А			RF-ATN-SMF-5W3	-	-
•	SCALE	: NTS	ENGINEE	O00000 SHEET 1	OF	1