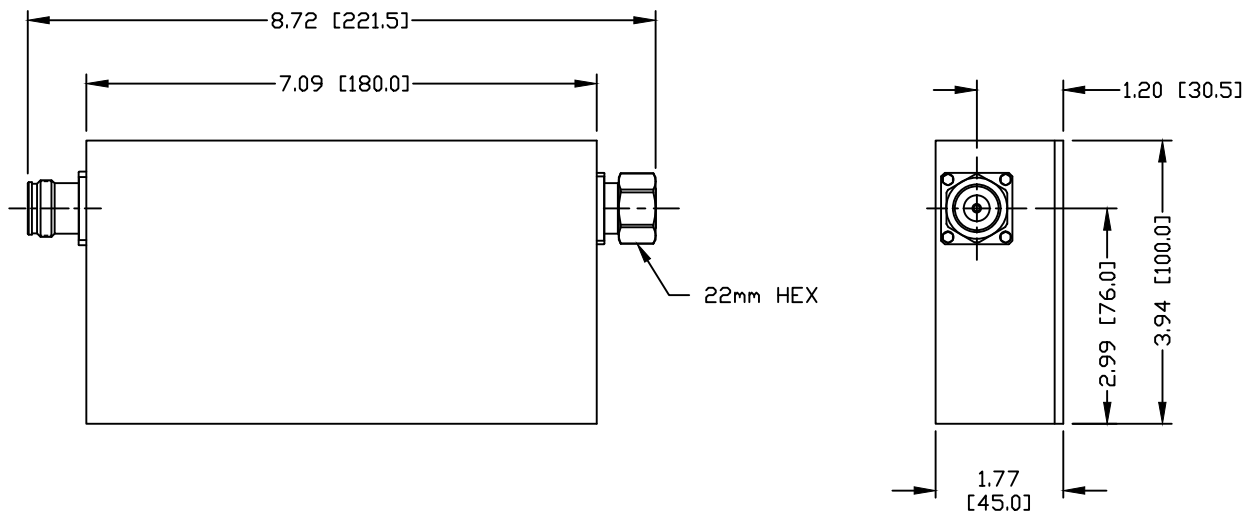


PART NO.

RF-ATNLP-43MF-5W3

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	09/19/19	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 617-2700MHZ
 ATTENUATION: -3dB
 COUPLING TOLERANCE: ± 1.0 dB
 AVERAGE POWER: 5 WATT
 VSWR: ≤ 1.3
 3rd ORDER IM: ≤ -150 dBc (RELATIVE TO CARRIER)
 3rd ORDER IM TEST METHOD: 2x37dBm CARRIERS
 OPERATION TEMPERATURE: $-30^{\circ}\text{C} \sim +65^{\circ}\text{C}$
 COLOR: BLACK
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS

CUSTOMER OUTLINE DRAWING		RoHS COMPLIANT		RFconnectors DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340	
ALL DIMENSIONS ARE REFERENCE ONLY						(858) 549-6345 FAX	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		5 WATT 3dB ATTENUATOR 4.3/10 MALE TO 4.3/10 FEMALE - 617-2700MHZ			
DRAWN C. ZUNIGA	09/19/19	SIZE A	CABLE GROUP N/A	DWG NO. RF-ATNLP-43MF-5W3	REVISION —		
CHECKED		SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1			
ORJ DRAWN C. ZUNIGA	09/19/19						