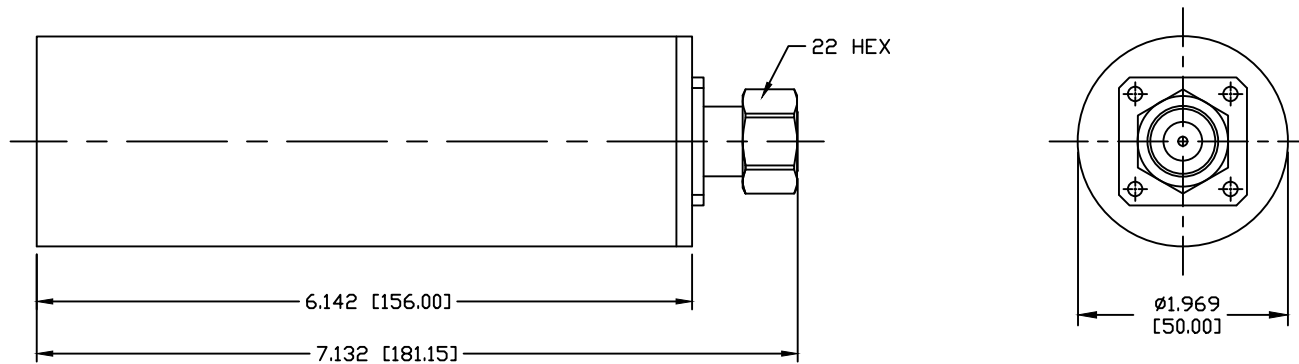


PART NO.

**RFLOAD-43M2**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	12/12/19	JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 OPERATION FREQUENCY BAND: 600-2700MHz  
 3RD ORDER IM: -160dBc (RELATIVE TO CARRIER)  
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS  
 VSWR:  $\leq 1.25$   
 AVERAGE POWER: 2W  
 TEMPERATURE RANGE: -30°C ~ +65°C  
 COLOR: BLACK  
 NOTES:  
 CONNECTOR WILL HAVE PROTECTIVE CAP ON

CUSTOMER OUTLINE DRAWING ALL DIMENSIONS ARE REFERENCE ONLY UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		<b>RoHS</b> <b>COMPLIANT</b>		<b>RFconnectors</b> DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX			
DRAWN C. ZUNIGA CHECKED		12/12/19		<b>PROPRIETARY AND CONFIDENTIAL</b> THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.				<b>2 WATT TERMINATION LOAD</b> <b>4.3-10 MALE - 600-2700 MHz</b>	
ORJ DRAWN C. ZUNIGA		12/12/19		SIZE A	CABLE GROUP	DWG NO. <b>RFLOAD-43M2</b>	REVISION —		
		SCALE: NTS	ENGINEERING ID: 2000010		SHEET 1 OF 1				