


PART NO.

**RFN-1009-SR2LP**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	03/10/15	JDMc

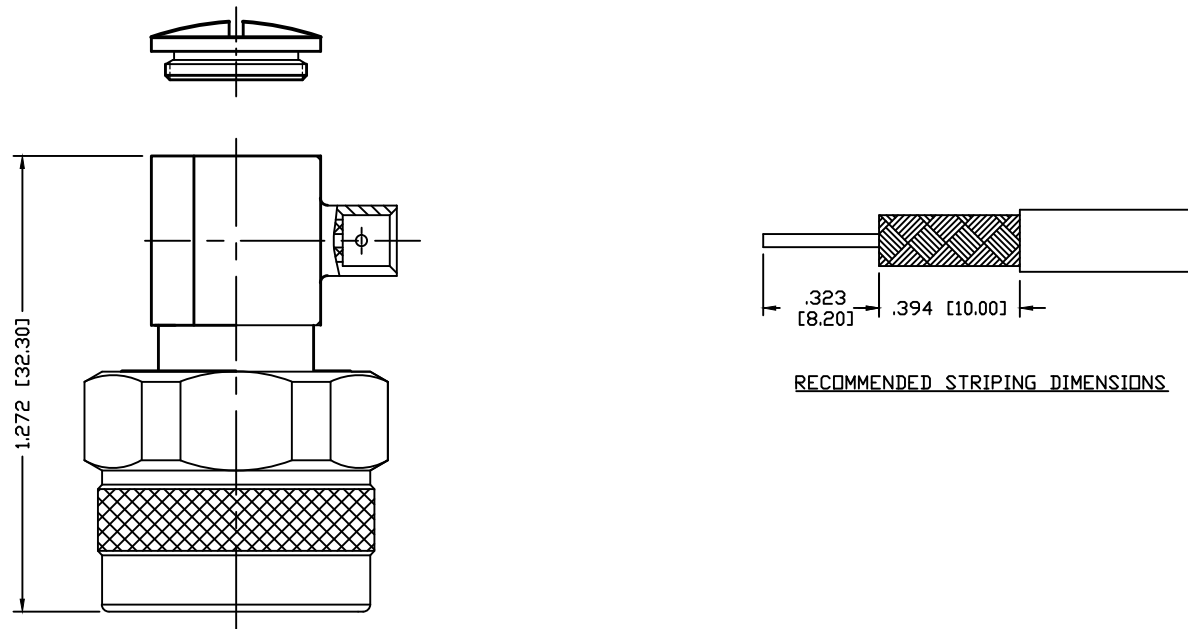

RECOMMENDED STRIPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-3GHz

VSWR: &lt;1.2:1 THRU 3GHz

PIM: ≤-155 dBc

DIELECTRIC WITHSTANDING VOLTAGE: 750V/AC

INSULATION RESISTANCE: 5000 MOHMS

TEMPERATURE RANGE: -40°C TO 155°C

MECHANICAL DURABILITY: 500 CYCLES

FOR .141 SEMI RIGID, RG-402/U &amp; BELDEN 1673A CABLE

9	SHELL	1	BRASS	WHITE BRONZE
8	SCREW CAP	1	BRASS	WHITE BRONZE
7	GASKET	1	RUBBER	----
6	INSERT	1	PTFE	----
5	RETAINING RING	1	Be.Cu.	WHITE BRONZE
4	PRESS BODY	1	BRASS	WHITE BRONZE
3	PIN	1	BRASS	SILVER
2	INSULATOR	1	PTFE	----
1	BODY	1	BRASS	WHITE BRONZE
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]

DRAWN	C. ZUNIGA	03/10/15
CHECKED		
ORJ DRAWN	C. ZUNIGA	03/10/15

**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES, ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.

**RFconnectors**  
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340

**N PLUG SOLDER**  
RIGHT ANGLE

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	<b>RFN-1009-SR2LP</b>	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	1787		