


MOUNTING BRACKET INCLUDED

PART NO.		<b>RFPT-43F-A3</b>		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	09/10/18	JDMc

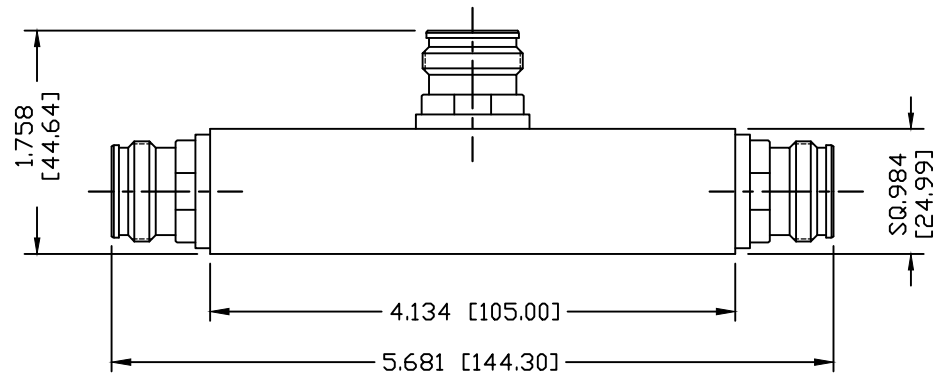

SPECIFICATIONS:

IMPEDANCE: 50 Ohms  
 OPERATION FREQUENCY BAND: 350-1400 & 1710-2700 MHz  
 OUTPUT SPLIT RATIO: 2:1/3dB  
 MAIN BRANCH: -1.8dB/-4.8dB  
 BRANCH FLATNESS: ±1.5  
 3RD INTERMODULATION: -160 dBc (RELATIVE TO CARRIER)  
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS  
 POWER RATING:  
     AVERAGE POWER: 300 WATTS  
     PEAK POWER: 1300 WATTS  
 VSWR: ≤1.3:1  
 DISSIPATION LOSS: ≤0.3dB (MAIN LANE)  
 TEMPERATURE RANGE: -30°C ~ +75°C  
 APPLICATION: INDOOR/OUTDOOR  
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:  
 ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING <hr/> ALL DIMENSIONS ARE REFERENCE ONLY <hr/> UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		<b>RoHS</b> <b>COMPLIANT</b>	<b>RFconnectors</b> DIVISION OF RF INDUSTRIES, LTD.	7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
DRAWN C. ZUNIGA      09/10/18 CHECKED		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		<b>3 dB POWER TAPPER</b> <b>4.3-10 FEMALE - 350-2700 MHz</b>	
ORJ DRAWN C. ZUNIGA	09/10/18	SIZE A	CABLE GROUP	DWG NO. <b>RFPT-43F-A3</b>	REV —
		SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1	