


MOUNTING BRACKET INCLUDED

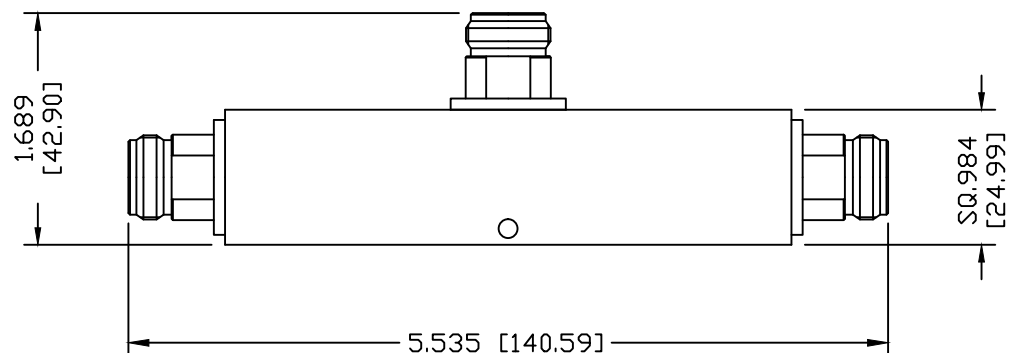

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 350–2700 MHz
 3RD INTERMODULATION: –155 dBc (RELATIVE TO CARRIER)
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS
 POWER RATING: 200 WATT
 COUPLING: 10dB
 COUPLING TOLERANCE (350–960 MHz): ± 1.0 dB
 COUPLING TOLERANCE (1710–2700 GHz): $\pm .5$ dB
 VSWR: 350–2700 MHz 1.25:1
 INSERTION LOSS: ≤ 0.8 dB @ 350–2700MHz
 RETURN LOSS: 20.8 (INPUT)
 TEMPERATURE RANGE: –40°C ~ +75°C
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:
 ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

PART NO.		RFPT-NF-A10		
REV	DESCRIPTION	DWN	DATE	APPROVED
–	ENGINEERING RELEASE	CZS	07/07/18	JDMc

<div>CUSTOMER OUTLINE DRAWING</div> <div>ALL DIMENSIONS ARE REFERENCE ONLY</div> <div>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]</div>		<div>RoHS COMPLIANT</div> <div>PROPRIETARY AND CONFIDENTIAL</div> <div>THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.</div>	<div>RFconnectors</div> <div>DIVISION OF RF INDUSTRIES, LTD.</div>		<div>7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX</div>	
<div>DRAWN C. ZUNIGA</div> <div>CHECKED</div>	<div>09/06/18</div>		<div>10 dB POWER TAPPER</div> <div>N FEMALE - 350-2700 MHz</div>			
<div>ORJ DRAWN C. ZUNIGA</div>	<div>07/07/18</div>	<div>SIZE A</div>	<div>CABLE GROUP</div>	<div>DWG NO. RFPT-NF-A10</div>	<div>REV —</div>	
		<div>SCALE: NTS</div>	<div>ENGINEERING ID: 000000</div>	<div>SHEET 1 OF 1</div>		