
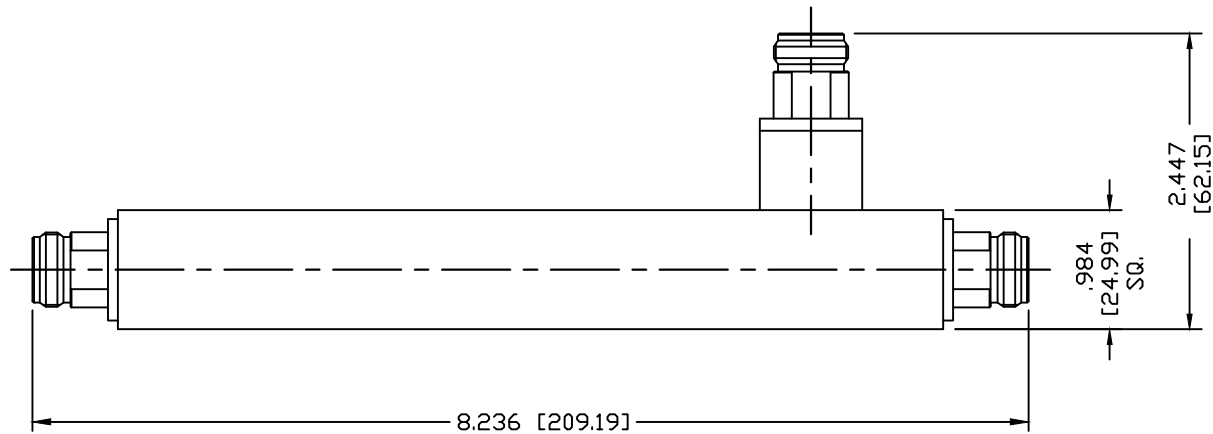


PART NO.

**RFPT-NF-C10**

REV	DESCRIPTION	DWN	DATE	APPROVED
A	UPDATED MOUNTING BRACKET	CZS	11/28/18	JDMc

MOUNTING BRACKET INCLUDEDSPECIFICATIONS:

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 698–2700 MHz  
 COUPLING:  $10 \pm 1.0$  dB  
 INSERTION LOSS:  $0.5 \pm 0.2$   
 VSWR: 1.35:1  
 POWER RATING: 200W  
 3RD INTERMODULATION:  $-155$  dBc (RELATIVE TO CARRIER)  
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS  
 TEMPERATURE RANGE:  $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 APPLICATION: INDOOR/OUTDOOR  
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

## NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING		<b>RoHS COMPLIANT</b>		<b>RFconnectors</b> DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
ALL DIMENSIONS ARE REFERENCE ONLY						<b>10 dB POWER TAPPER</b> <b>N FEMALE - 698-2700 MHz</b>	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		SIZE	CABLE GROUP	DWG NO.	REVISION
DRAWN C. ZUNIGA	11/28/18	A SCALE: NTS		A ENGINEERING ID: 000000		A SHEET 1 OF 1	
CHECKED				A ENGINEERING ID: 000000		A SHEET 1 OF 1	
ORJ DRAWN C. ZUNIGA	09/18/18			A ENGINEERING ID: 000000		A SHEET 1 OF 1	