


MOUNTING BRACKET INCLUDED

PART NO.		RFPT-NF-C7		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	09/14/18	JDMc

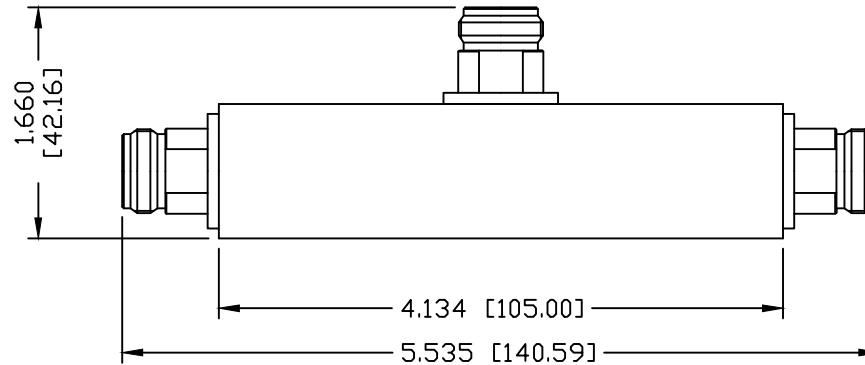

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 698-2700 MHz
 COUPLING: 7±1.0 dB
 INSERTION LOSS: 1.0±0.3
 VSWR: 1.35:1
 POWER RATING: 200W
 3RD INTERMODULATION: -155 dBc (RELATIVE TO CARRIER)
 3RD INTERMODULATION TEST METHOD: 2x43dBm CARRIERS
 TEMPERATURE RANGE: -35°C ~ +85°C
 APPLICATION: INDOOR/OUTDOOR
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS/IP65

NOTES:
 ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING		RoHS COMPLIANT	RFconnectors DIVISION OF RF INDUSTRIES, LTD.		7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX		
ALL DIMENSIONS ARE REFERENCE ONLY					7 dB POWER TAPPER - N FEMALE 698-1400 & 1710-2700 MHz		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]		PROPRIETARY AND CONFIDENTIAL THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.		SIZE A	CABLE GROUP	DWG NO. RFPT-NF-C7	REV —
DRAWN C. ZUNIGA	09/14/18	SCALE: NTS	ENGINEERING ID: 000000	SHEET 1 OF 1			