




PART NO.

ROA-5000-SR2LP

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	12/15/15	JDMc

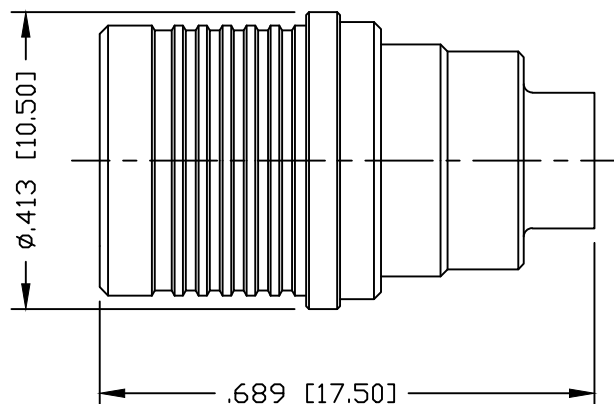

SOLDER ONLY

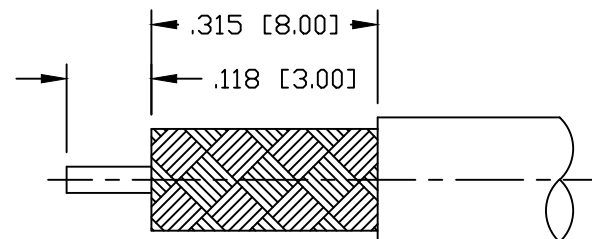

RECOMMENDED STRIPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-3 GHz

VSWR: ≤1.15

3RD ORDER IM: ≤155dBc @ 700 MHz

INSULATION RESISTANCE: 5k M Ohms min.

TEMPERATURE RANGE: -40°C TO 165°C

FOR .141 SEMI RIGID, RG-402/U & BELDEN 1673A CABLE

FOR LOW PIM APPLICATIONS USE TFT-402 CABLE

1	BODY	1	BRASS	GOLD
2	GROUND RING	1	BRASS	GOLD
3	INSULATOR	1	PTFE	---
4	SHELL	1	BRASS	GOLD
5	PIN	1	BRASS	GOLD
6	FERRULE	1	BRASS	GOLD
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUNIGA 12/15/15

CHECKED

ORJ DRAWN
C. ZUNIGA 12/15/15**RoHS
COMPLIANT**PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.**RFconnectors**7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX**QMA PLUG SOLDER**

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	ROA-5000-SR2LP	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		