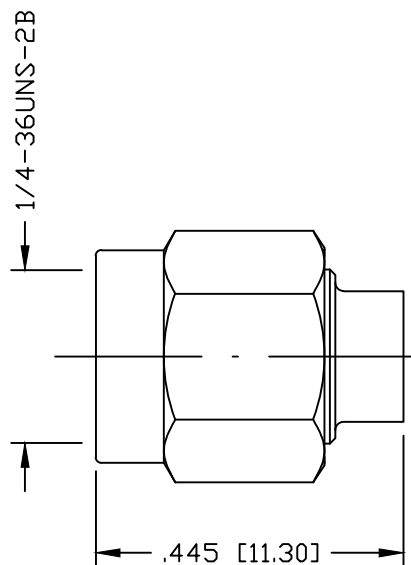
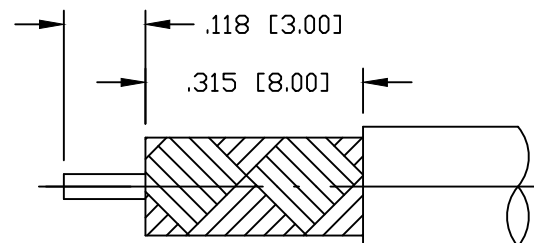


PART NO.

RSA-3500-SR2LP

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	12/15/15	JDMc

SOLDER ONLYRECOMMENDED STRIPING DIMENSIONS**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-12.4 GHz

VSWR: 1.3 MAX.

3RD ORDER IM: $\leq 155\text{dBc}$ @ 700 MHz

INSULATION RESISTANCE: 5k M Ohms min.

TEMPERATURE RANGE: -65°C TO 165°C

FOR .141 SEMI RIGID, RG-402/U & BELDEN 1673A CABLE

FOR LOW PIM APPLICATIONS USE TFT-402 CABLE

1	BODY	1	BRASS	GOLD
2	RETAINING RING	1	BRASS	GOLD
3	INSULATOR	1	PTFE	---
4	SHELL	1	BRASS	GOLD
5	PIN	1	BRASS	GOLD
6	GASKET	1	SI RUBBER	---
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUNIGA 12/15/15
CHECKEDORJ DRAWN
C. ZUNIGA 12/15/15**RoHS
COMPLIANT**PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.**RFconnectors**
DIVISION OF RF INDUSTRIES, LTD.7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX**SMA PLUG, SOLDER**

SIZE	CABLE GROUP	DWG NO.	REV
A	SR2	RSA-3500-SR2LP	—
SCALE:	ENGINEERING ID:	000000	SHEET 1 OF 1
NTS			