

# RF Attenuator

## 50 Watt N Male to N Female

### Features

High Power


Wide Frequency Band DC-3GHz

2G/3G/4G/5G/LTE Coverage

Low VSWR

Widely used for In-building Solutions

In-line, bi-directional attenuators for managing signal power levels. Available in various attenuation values, connectors, frequencies and power levels. Applications include Distributed Antenna Systems (DAS), test equipment and electrical circuits where power levels need to be reduced.

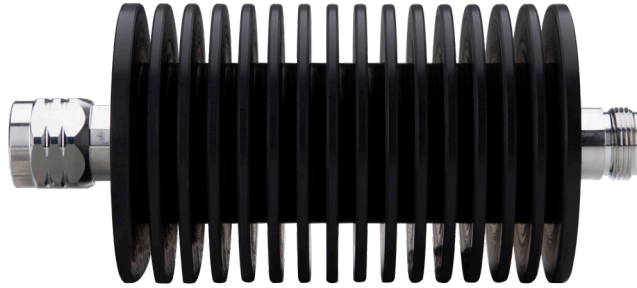

### GENERAL SPECIFICATIONS

Connector Type .....	N Male to N Female
Frequency Range.....	DC-3GHz
Impedance.....	50Ω
Power Rating .....	50 WATT(average)
VSWR Max .....	≤1.20:1
Temperature Range.....	-30° C to +65° C
Color.....	Black

Model Number	Attenuation (dB)	Accuracy (dB)
RF-ATN-NMF-50W6	6dB	±0.5dB

