



# 13dB Directional Coupler 7-16 DIN Female, 380-2700MHz

## RFDC-13DBA-DF

**Low PIM**

**Low VSWR**

**Other  
Configurations  
Available**

**50 Ohms  
Impedance**


**RoHS Compliant**

**IP 67 Rated**



**RF Industries**  
(NASDAQ: RFI)

7610 Miramar Road  
San Diego, CA 92126  
(800) 233-1728  
(858) 549-6340  
Fax: (858) 549-6345  
rfi@rfindustries.com  
www.rfindustries.com

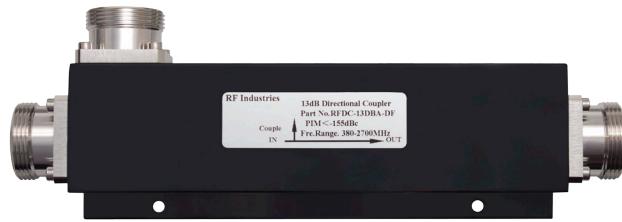

### GENERAL SPECIFICATIONS

Device Type	.....	Directional Coupler
Interface	.....	7-16 DIN Female
Color	.....	Black
Dimensions	.....	8.66" L x 3.10" W x 1.43" H
Bracket Included	.....	Yes
Weight	.....	2 lbs

### ELECTRICAL SPECIFICATIONS

Operation Frequency Band	.....	380-2700 MHz
3rd Intermodulation	.....	≤ -155 dBc (relative to carrier)
3rd Intermodulation Test Method	.....	Two +43 dBm Carriers
Average Power, Maximum	.....	500 Watt
Peak Power	.....	1.5 Kw
Coupling	.....	13dB
Coupling Tolerance	.....	± 1.2dB
Impedance	.....	50Ω
Insertion Loss	.....	≤ 0.5dB@380-2700 MHz
Directivity	.....	≥ 20dB
Isolation at Frequency Band	.....	≥ 33dB@380-2700 MHz
VSWR	.....	≤ 1.25

### MECHANICAL SPECIFICATIONS

Inner Contact Plating	.....	Silver
Outer Plating	.....	White Bronze (Tri-Metal)

### ENVIRONMENTAL SPECIFICATIONS

Application	.....	Indoor/Outdoor
Operating Temperature	.....	-30°C ~ +75°C; -22°F ~ +167°F
Relative Humidity	.....	Up to 100%
Regulatory Compliance / Certifications	.....	RoHS / IP67

