

2 Watt Dummy Load 7-16 DIN Male, DC-6GHz


RFDL-2W-DM

Low VSWR

**Other
Configurations
Available**

**50 Ohms
Impedance**

RoHS Compliant

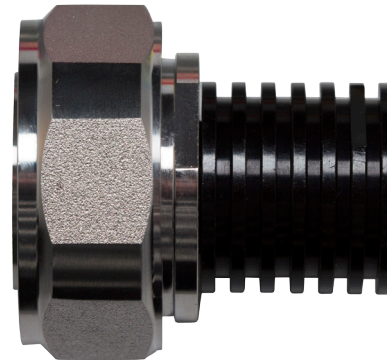

GENERAL SPECIFICATIONS

Device Type Dummy Termination Load
Interface 7-16 DIN Male

ELECTRICAL SPECIFICATIONS


Frequency DC-6GHz
Average Power 2Watt
Impedance 50Ω
VSWR ≤ 1.08 at 3GHz, ≤ 1.20 at 6GHz

MECHANICAL SPECIFICATIONS

Inner Contact Plating Silver
Outer Plating White Bronze / Brass (Tri-Metal)
Heat Sink Plating Aluminum (Black Anodized)

ENVIRONMENTAL SPECIFICATIONS

Application Indoor
Operating Temperature -35°C ~ +125°C; -31°F ~ +257°F
Relative Humidity Up to 95%

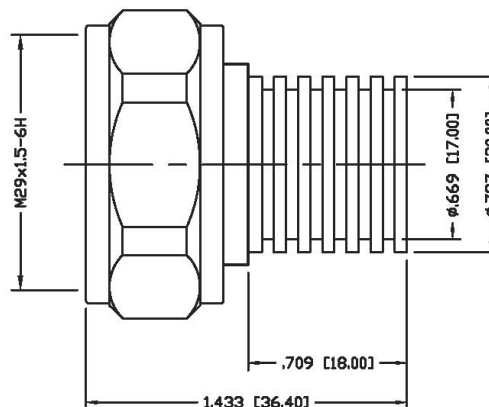

RF Industries

(NASDAQ: RFIIL)

7610 Miramar Road
San Diego, CA 92126

(800) 233-1728

(858) 549-6340

Fax: (858) 549-6345

rfi@rfindustries.com

www.rfindustries.com