

# Two Way Power Splitter N Female, 380-2700MHz

RFPS-2A-NF

**Low PIM**


**Low VSWR**

**Other Configurations Available**

**50 Ohms Impedance**

**RoHS Compliant**

**IP67 Rated**



## GENERAL SPECIFICATIONS

Device Type .....	Power Splitter
Interface .....	N Female
Color .....	Black
Weight.....	1.06 lb
Dimensions.....	12.9" L x 2.4" W x 1.0" H
Bracket Included.....	No

## ELECTRICAL SPECIFICATIONS




Operation Frequency Band.....	380-2700 MHz
3rd Intermodulation .....	≤-155 dBc min (relative to carrier)
3rd Intermodulation Test Method.....	Two +43 dBm carriers
Average Power .....	350 Watt
Impedance.....	50Ω
Insertion Loss .....	<0.22dB@380-2700 MHz
Peak Power .....	1.5 Kw
Split Loss .....	.3dB
VSWR.....	≤1.25

## MECHANICAL SPECIFICATIONS

Inner Contact Plating.....	Silver
Outer Plating.....	White Bronze (Tri-Metal)

## ENVIRONMENTAL SPECIFICATIONS

Application .....	Indoor/Outdoor
Operating Temperature.....	-30°C~+75°C; -22°F~+167°F
Relative Humidity .....	Up to 100%
Regulatory Compliance / Certifications.....	RoHS / IP67

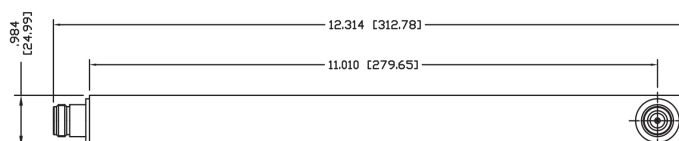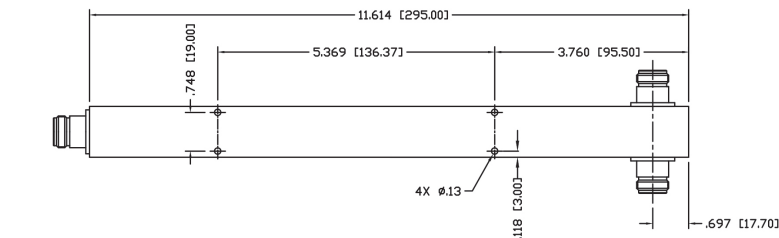

**RF Industries**

(NASDAQ: RFIIL)

7610 Miramar Road  
San Diego, CA 92126

(800) 233-1728

(858) 549-6340

Fax: (858) 549-6345

rfi@rfindustries.com

www.rfindustries.com