
PAR	PT-4000-011-WB			
REV	DESCRIPTION	DWN	DATE	APPROVED
Г	ENGINEERING RELEASE	CZS	02/11/11	JDMc

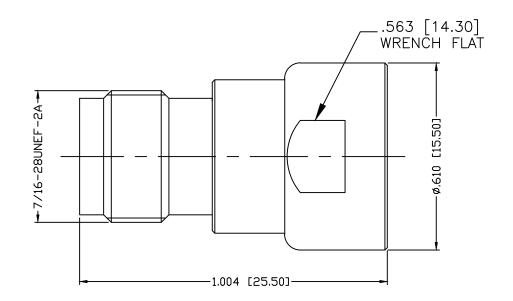

## **SPECIFICATIONS:**

IMPEDANCE: 50 OHMS

WORKING VOLTAGE: 500 VRMS @ SEA LEVEL

FREQUENCY RANGE: 0-7 GHz INSERTION LOSS: ≤ -.2 dB VSWR MAX: 1.3:1

V.	SWR MAX: 1.5:1	AND [MILLIMETERS]					
4	CONTACT	1	BRASS	GOLD	DRAWN	02/11/11	
3	INSULATOR	1	PTFE		C. ZUNIGA	02/11/11	
2	PRESS BODY	1	BRASS	WHITE BRONZE	CHECKED		١,
1	BODY	1	BRASS	WHITE BRONZE	ORJ DRAWN		ľ
#	DESCRIPTION	QTY	MATERIAL	FINISH	C. ZUNIGA	02/11/11	
							_

## CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES

## THIS DRAWING CONTENTS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES, ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PROPRIETARY AND CONFIDENTIAL



NTS

7610 MIRAMAR RD.

## UNIDAPT TO TNC JACK

THO UNCIL								
SIZE	CABLE	GROUP	DWG NO.				REV	
А	N/A		PT-4000-011-WB					
SCALE: NTS		ENGINEE	RING ID:	001560	SHEET	1	OF	1