


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.		PT-4000-113		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	8/5/02	JDMc

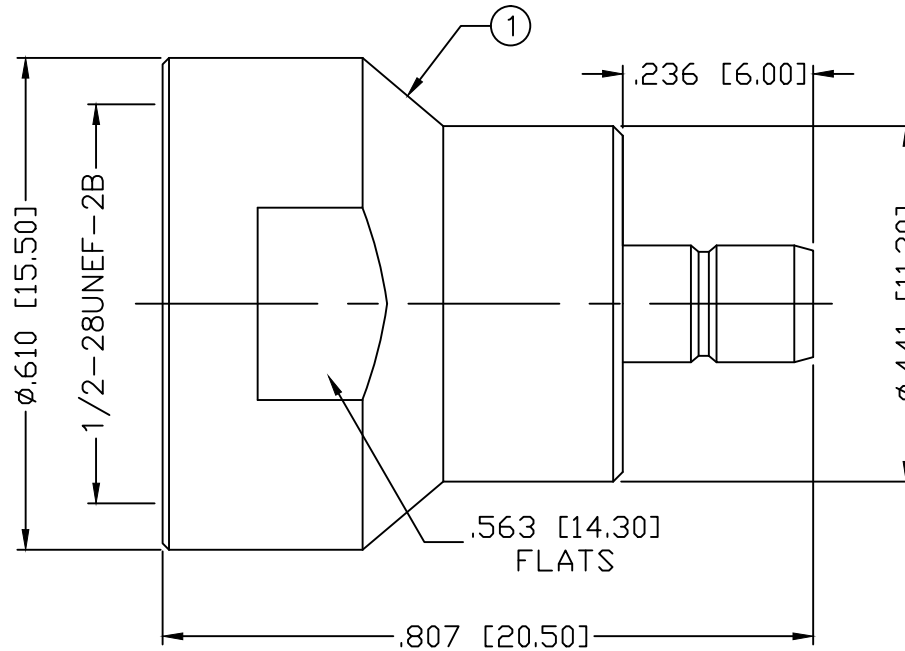

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-3 GHz
 WORKING VOLTAGE: 335 V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 165°C
 INSULATION RESISTANCE: 5k M Ohms min.

1	BODY	1	BRASS	SILVER, 80µ"	008974	
2	INSULATOR	1	PTFE	---		
3	INSULATOR	1	PTFE	---		
4	CONTACT	1	PHOS BRONZE	GOLD, 3µ"		
5	LOCK RING	1	BRASS	SILVER, 80µ"		
6						
7						
8						
9						
10					DRAWN C. ZUNIGA	
11					3/24/04	
12					CHECKED	
13						
14						
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED
 TOLERANCES ARE:
 DECIMALS DIAMETER

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

UNIDAPT TO
 SMB JACK, ADAPTER

SIZE A	CABLE GROUP N/A	DWG NO. PT-4000-113	REV -
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1