


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFA-4054-01

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	9/23/05	JDMc

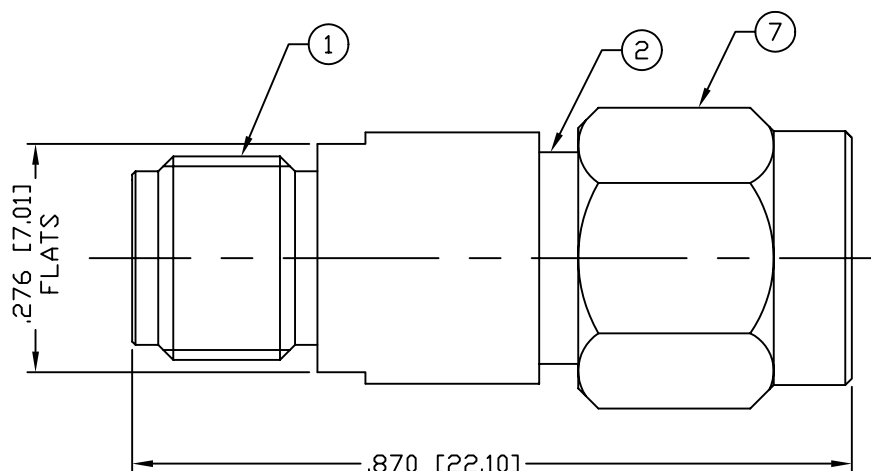

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
FREQUENCY RANGE: DC-4 GHz
INPUT POWER: 2 WATTS @ 25° C
PEAK POWER 1000 WATTS
VSWR: 1.15 MAX.
TEMPERATURE RANGE: -20°C TO 100°C

1	SMA BODY	1	BRASS	GOLD,	000712	UNLESS OTHERWISE SPECIFIED:	<div><div>RFconnectors</div><div>DIVISION OF RF INDUSTRIES, LTD.</div><div>7610 MIRAMAR RD SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX</div></div>						
2	BODY	1	BRASS	GOLD,									
3	CONTACT	1	Be.Cu.	GOLD,									
4	PIN	1	Be.Cu.	GOLD,									
5	INSULATOR	1	PTFE	---									
6	INSULATOR	1	PTFE	---									
7	SHELL	1	SST	GOLD,									
8	RETAINING RING	1	Be.Cu.	NICKEL,									
9	GASKET	1	SILICONE	---									
10	ATTENUATOR CHIP	1	---	---									
11					DRAWN C. ZUNIGA	9/23/05	DIMENSIONS ARE IN INCHES AND [MILLIMETERS] UNLESS OTHERWISE NOTED TOLERANCES ARE: DECIMALS DIAMETER	SMA PLUG TO JACK ATTENUATOR 1dB					
12					CHECKED								
13					ORJ DRAWN C. ZUNIGA	9/23/05							
14													
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE	SIZE A	CABLE GROUP N/A	DWG NO. RFA-4054-01	REV —	SCALE: NTS	CAD FILE OUTLINE	SHEET 1 OF 1