


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,  
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED  
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.  
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

**RFA-4054-10**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	04/08/08	JDMc

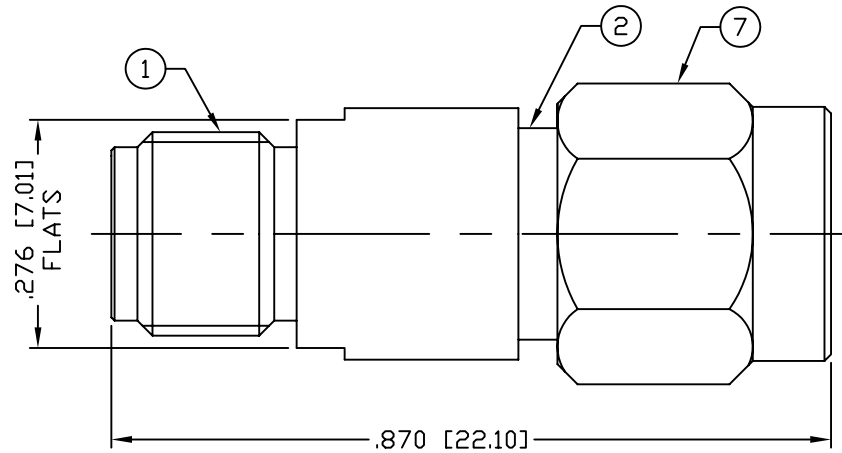

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: DC-4 GHz  
 INPUT POWER: 2 WATTS @ 25°C  
 PEAK POWER: 1000 WATTS  
 VSWR: 1.15 MAX.  
 TEMPERATURE RANGE: -20°C TO 100°C

1	SMA BODY	1	BRASS	GOLD	000712	DRAWN C. ZUNIGA 04/08/08
2	BODY	1	BRASS	GOLD		
3	CONTACT	1	Be.Cu.	GOLD		
4	PIN	1	Be.Cu.	GOLD		
5	INSULATOR	1	PTFE	----		
6	INSULATOR	1	PTFE	----		
7	SHELL	1	SST	GOLD		
8	RETAINING RING	1	Be.Cu.	NICKEL		
9	GASKET	1	SILICONE	----		
10	ATTENUATOR CHIP	1	----	----		
11					CHECKED	
12						
13					ORJ DRAWN	
14					C. ZUNIGA	04/08/08
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES  
 AND [MILLIMETERS]  
 UNLESS OTHERWISE NOTED  
 TOLERANCES ARE:  
 DECIMALS      DIAMETER

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

**SMA PLUG TO JACK  
 ATTENUATOR 10 dB**

SIZE A	CABLE GROUP N/A	DWG NO. RFA-4054-10	REV -
SCALE: NTS	CAD FILE OUTLINE	SHEET 1 OF 1	