


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFA-4054-20

| REV | DESCRIPTION | DWN | DATE | APPROVED |
|-----|---------------------|-----|---------|----------|
| - | ENGINEERING RELEASE | CZS | 9/23/05 | JDMc |
| | | | | |
| | | | | |

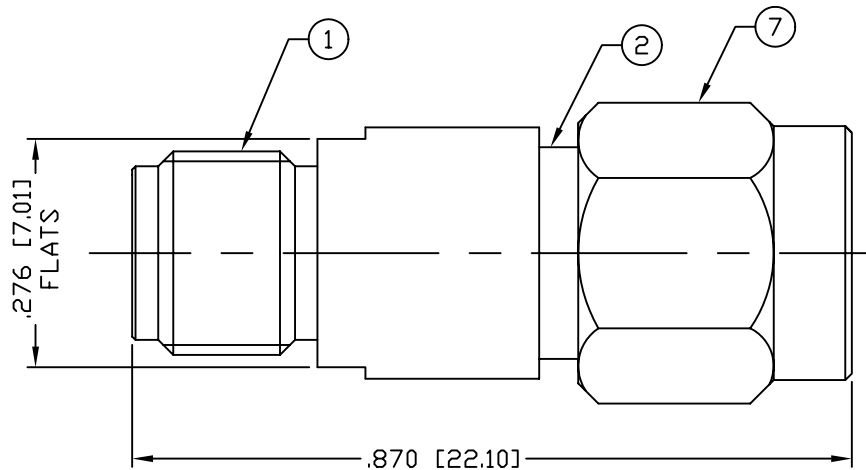

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: DC-4 GHz
 INPUT POWER: 2 WATTS @ 25° C
 PEAK POWER 1000 WATTS
 VSWR: 1.15 MAX.
 TEMPERATURE RANGE: -20°C TO 100°C

| | | | | | | |
|----|-----------------|-----|----------|---------|-----------|-----------------------------|
| 1 | SMA BODY | 1 | BRASS | GOLD, | 000712 | UNLESS OTHERWISE SPECIFIED: |
| 2 | BODY | 1 | BRASS | GOLD, | | |
| 3 | CONTACT | 1 | Be.Cu. | GOLD, | | |
| 4 | PIN | 1 | Be.Cu. | GOLD, | | |
| 5 | INSULATOR | 1 | PTFE | ---- | | |
| 6 | INSULATOR | 1 | PTFE | ---- | | |
| 7 | SHELL | 1 | SST | GOLD, | | |
| 8 | RETAINING RING | 1 | Be.Cu. | NICKEL, | | |
| 9 | GASKET | 1 | SILICONE | ---- | | |
| 10 | ATTENUATOR CHIP | 1 | ---- | ---- | | |
| 11 | | | | | DRAWN | 9/23/05 |
| 12 | | | | | C. ZUNIGA | |
| 13 | | | | | CHECKED | |
| 14 | | | | | ORJ DRAWN | |
| # | DESCRIPTION | QTY | MATERIAL | FINISH | APPROVALS | DATE |

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED
 TOLERANCES ARE:
 DECIMALS DIAMETER

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

**SMA PLUG TO JACK
 ATTENUATOR 20dB**

| | | | |
|------------|--------------------|------------------------|----------|
| SIZE A | CABLE GROUP N/A | DWG NO. RFA-4054-20 | REV - |
| SCALE: NTS | CAD FILE OUTLINE | SHEET 1 OF 1 | |