



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY


PART NO.

RFB-1123-C1


REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	KMM	3/6/99	R. RICE
B	CHANGE FERRULE STUD TO KNURL	CZS	4/1/05	J. D. McR.

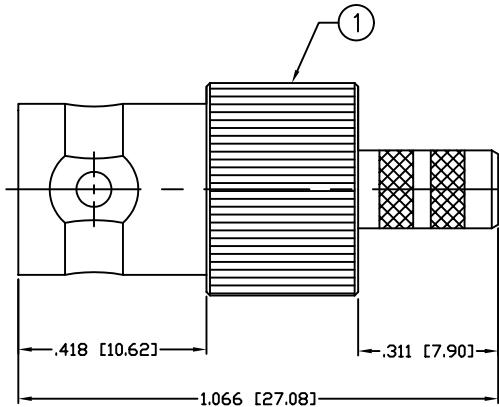

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .213"

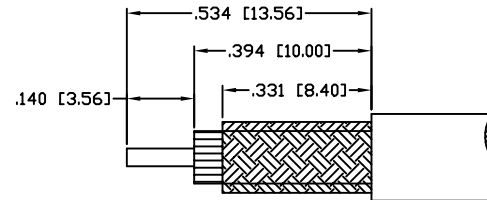

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-4 GHz
 VSWR: 1.3 Max.
 WORKING VOLTAGE: 500 V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 165°C
 INSULATION RESISTANCE: 5k M Ohms min.
 FOR RG-55, 55A, 55B, 142, 142A, 142B, 223 & 400/U,
 ALPHA 9055, 9055B, 9223, BELDEN 8219, 83242, 84142

1	BODY	1	BRASS	NICKEL, 80μ"	000486	UNLESS OTHERWISE SPECIFIED:
2	CONTACT	1	BRASS	GOLD, 3μ"		
3	DIELECTRIC	1	PTFE	---		
4	WASHER	1	BRASS	NICKEL, 80μ"		
5	FERRULE	1	BRASS	NICKEL, 80μ"		
6						
7						
8						
9						
10					DRAWN	4/1/05
11					C. ZUNIGA	
12					CHECKED	
13					ORJ DRAWN	3/6/99
14					K. MAXWELL	
#	DESCRIPTION	QTY	MATRL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DECIMALS DIAMETER

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

BNC JACK CRIMP

SIZE	CABLE GROUP	DWG NO.	REV
A	C1	RFB-1123-C1	B
SCALE:	NTS	CAD FILE	OUTLINE
			SHEET 1 OF 1