




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.		RFB-1154		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	2/29/96	JDMc

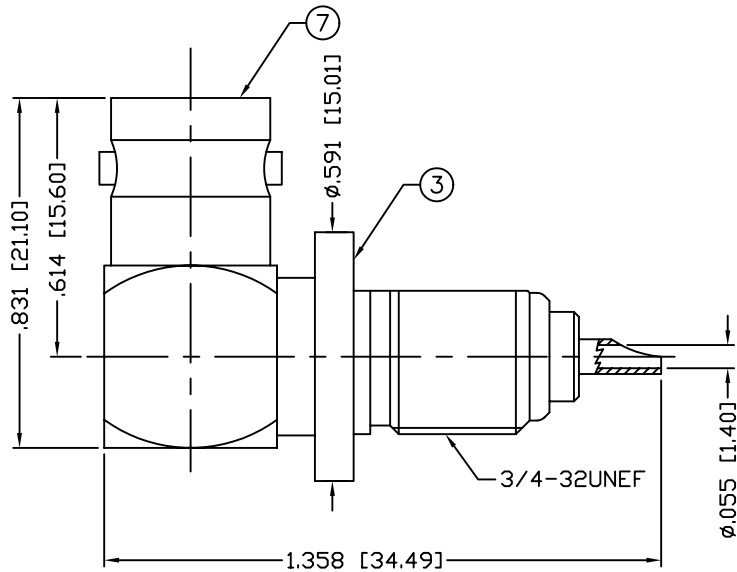

1/4" MAXIMUM PANEL THICKNESS

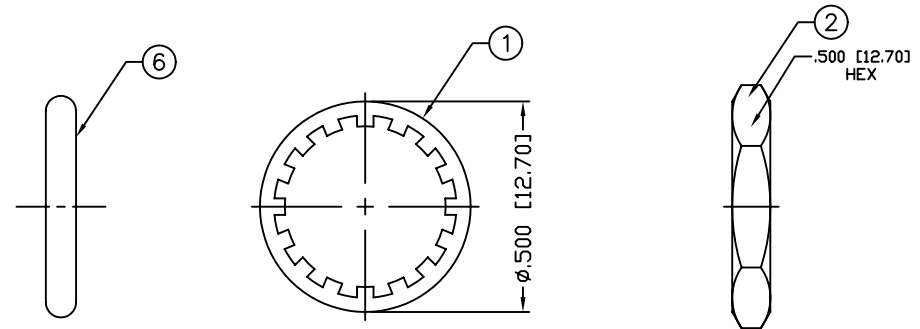

RECOMMENDED MOUNTING HOLE

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-4 GHz
 WORKING VOLTAGE: 500 V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 85°C
 INSULATION RESISTANCE: 5k M Ohms min.

1	WASHER	1	IRON	NICKEL, 100μ"	007777	
2	NUT	1	BRASS	NICKEL, 100μ"		
3	PRESS BODY	1	BRASS	NICKEL, 100μ"		
4	INSULATOR	1	PTFE	---		
5	CONTACT	1	BRASS	GOLD, 3μ"		
6	O-RING	1	RUBBER	---		
7	BODY	1	BRASS	NICKEL, 100μ"		
8	WASHER	1	BRASS	NICKEL, 100μ"		
9	INSULATOR	1	PTFE	---		
10					DRAWN	
11					C. ZUNIGA	2/14/06
12					CHECKED	
13					ORJ DRAWN	
14					C. ZUNIGA	2/14/06
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DECIMALS DIAMETER

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

BNC JACK, BULKHEAD

RIGHT ANGLE, SOLDER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFB-1154	-
SCALE:	NTS	CAD FILE	OUTLINE
SHEET 1 OF 1			