
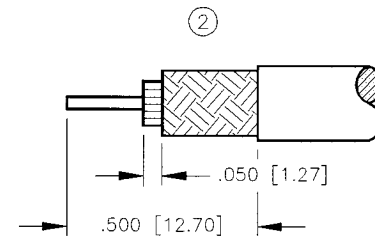
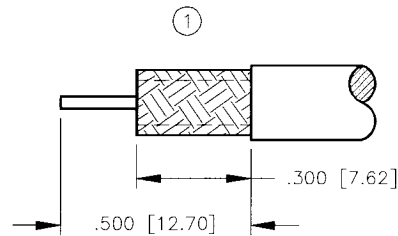
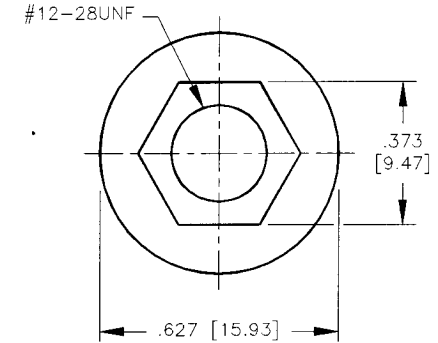
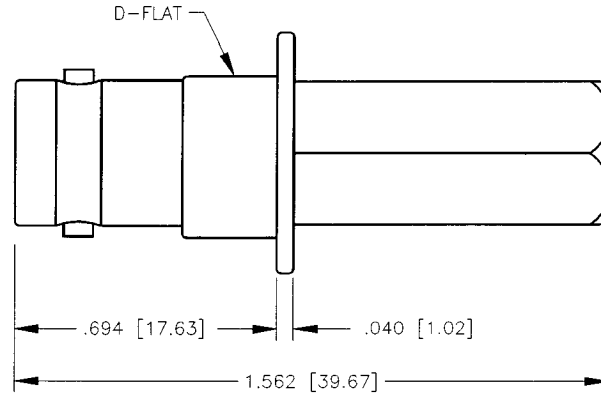


ENVELOPE / ASSEMBLY DRAWING

000000

SPECIFICATION CONTROL DRAWING THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.	REV	DESCRIPTION	DWN	DATE	APPROVED
	A	ENGINEERING RELEASE	CJ	9/17/93	J. BENZ
	B	CHANGE FLANGE THICKNESS	KMM	8/6/93	C. JONES
	C	ADD STRIPPING INSTRUCTIONS	CZS	12/21/98	R. RICE

ALL DIMENSIONS ARE REFERENCE ONLY

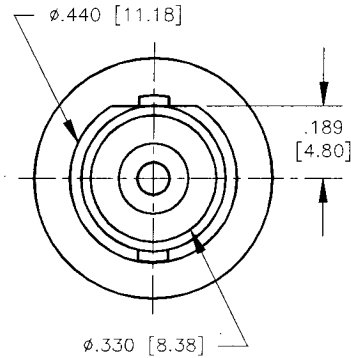

IF USING STRANDED CABLE
PRE-TINNING OF CENTER
CONDUCTOR IS RECOMMENDED

SUGGESTED STRIPPING INSTRUCTIONS

TRIM BRAID TO .300 THEN COMPRESS
BRAID BY TWISTING CLOCKWISE TO
EXPOSE .050 DIELECTRIC

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 500 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-1 GHz
 INSERTION LOSS: ≤ -5 dB @ 1 GHz
 VSWR MAX: 1.5:1 @ 1 GHz
 FOR RG-58, 58A, 58C, 141, 141A, 400/U, BELDEN 8240,
 8259, 8262, 9201, 9203, 9310, 9311,
 COMM/SCOPE 0268 & CUSHCRAFT ULTRALINK TL92463E
 INTERFACE PER MIL-STD-348A, SECTION 301.2

DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
TOLERANCES ARE:
DECIMALS DIAMETER

RF connectors
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
SAN DIEGO, CA 92126
(619)549-6340
(619)549-6345 FAX

RFB-1161

BNC FEMALE WALL PLATE FLUSH MOUNT TWIST ON JACK

DRAWN	C. ZUNIGA	12/21/98
CHECKED	<i>[Signature]</i>	12/21/98
OR. DRAWN	J. BENZ	4/6/93
APPROVALS		DATE

SIZE	CABLE GROUP	DWG NO.	REV
A	C	8077	C
SCALE: 2:1	CAD FILE 13ARC B	SHEET 1 OF 1	

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
3	DIELECTRIC	1	DELTRIN	NONE
2	CONTACT	1	BRASS	GOLD
1	BODY	1	BRASS	NICKEL