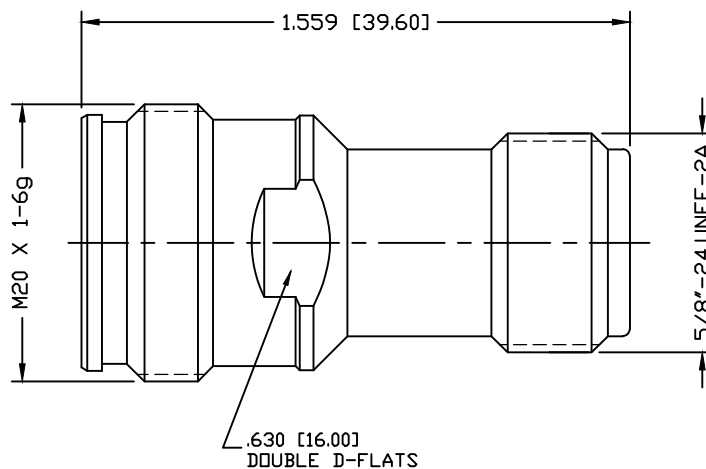


PART NO.

**RFD-43F-NF**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	06/26/15	JDMc

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-6 GHz

VSWR:  $\leq 1.15$ PIM:  $\leq -160\text{dBc}$ 

DIELECTRIC WITHSTANDING VOLTAGE: 2000V/AC

INSULATION RESISTANCE: 1000M $\Omega$ 

OPERATING TEMPERATURE: -40° to +155°

4	GROUND RING	1	BeCu	WHITE BRONZE
3	INSULATOR	1	PTFE	---
2	CONTACT	1	BeCu	SILVER
1	BODY	1	BRASS	WHITE BRONZE

DRAWN C. ZUNIGA		06/26/15
CHECKED		
ORJ DRAWN C. ZUNIGA		06/26/15

CUSTOMER

OUTLINE DRAWING

ALL DIMENSIONS  
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN INCHES  
AND [MILLIMETERS]**RoHS  
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING CONTAINS  
INFORMATION PROPRIETARY TO  
RF INDUSTRIES. ANY  
UNAUTHORIZED USE OF THIS  
DRAWING IS EXPRESSLY  
PROHIBITED WITHOUT WRITTEN  
PERMISSION FROM RF  
INDUSTRIES. ANY VIOLATION IS  
PUNISHABLE UNDER U.S.  
COPYRIGHT LAWS.

**RFconnectors**7610 MIRAMAR RD.  
SAN DIEGO, CA 92126  
(858) 549-6340  
DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX**4.3/10 JACK TO  
N JACK ADAPTER**

SIZE A	CABLE GROUP N/A	DWG NO. <b>RFD-43F- NF</b>	REV ---
SCALE: NTS	ENGINEERING ID: 001787	SHEET 1 OF 1	