


SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-2 GHz
 WORKING VOLTAGE: 335 Vrms
 INSULATION RESISTANCE: 5k M ohms min.
 TEMPERATURE RANGE: -65°C TO +165°C

PART NO.		RFE-6110		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	02/29/08	JDMc

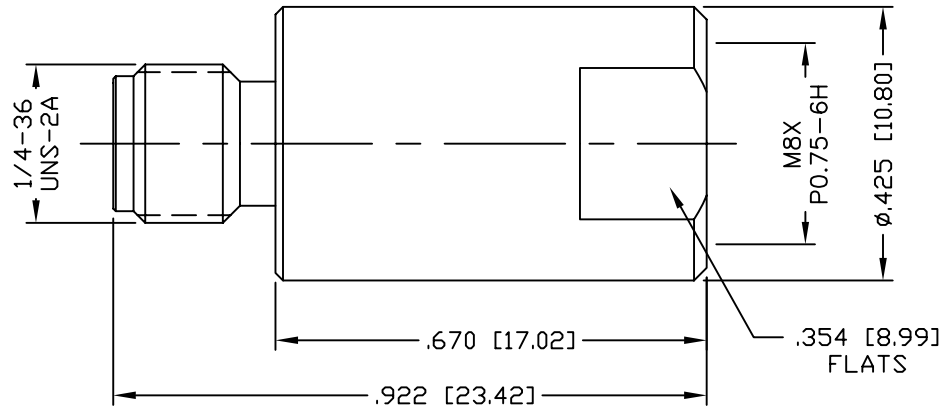

1	BODY	1	BRASS	NICKEL, 100μ"
2	INSULATOR	1	PTFE	---
3	CONTACT	1	PHOS BRONZE	GOLD, 3μ"
4	LOCK RING	1	BRASS	NICKEL, 100μ"
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER OUTLINE DRWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
DRAWN C. ZUNIGA	02/29/08
CHECKED	
ORJ DRAWN C. ZUNIGA	02/29/08
APPROVALS	DATE

**RoHS
COMPLIANT**

THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RF connectors		7610 MIRAMAR RD SAN DIEGO, CA 92126 (858) 549-6340 (858) 549-6345 FAX	
DIVISION OF RF INDUSTRIES, LTD.			
SMA JACK TO FME PLUG ADAPTER			
SIZE A	CABLE GROUP N/A	DWG NO. RFE-6110	REV —
SCALE: NTS	ENGINEERING ID 008974	SHEET 1 OF 1	