


PART NO. RFE-6111

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/20/02	JDMc
A	UPDATED CONNECTOR DESIGN	CZS	05/19/14	JDMc

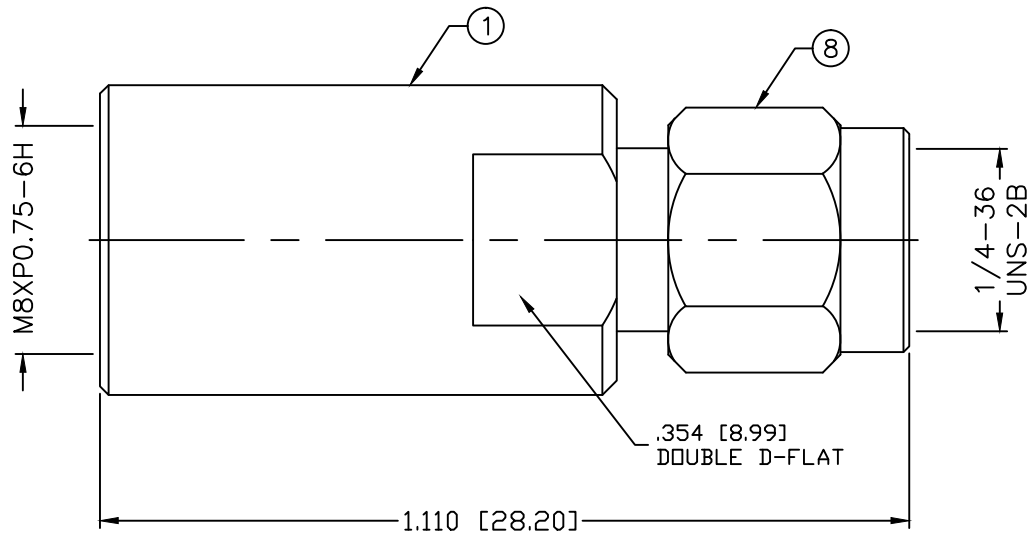

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-2 GHz
 WORKING VOLTAGE: 335 Vrms
 INSULATION RESISTANCE: 5k M ohms min.
 TEMPERATURE RANGE: -65°C TO +85°C

#	DESCRIPTION	QTY	MATERIAL	FINISH
8	SHELL	1	BRASS	NICKEL, 100μ"
7	RETAINING RING	1	Be.Cu.	----
6	GASKET	1	SILICONE	----
5	LOCK RING	1	BRASS	NICKEL, 100μ"
4	INSULATOR	1	PTFE	----
3	PIN	1	BRASS	GOLD, 3μ"
2	INSULATOR	1	PTFE	----
1	BODY	1	BRASS	NICKEL, 100μ"

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUNIGA	05/19/14
CHECKED	
ORJ DRAWN C. ZUNIGA	11/20/02

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

SMA PLUG TO FME PLUG ADAPTER

SIZE A	CABLE GROUP N/A	DWG NO. RFE-6111	REV A
SCALE: NTS	ENGINEERING ID: 000494	SHEET 1 OF 1	