
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.

ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PAR	RFF-1445-5	,		
REV	DESCRIPTION	DWN	DATE	APPROVED
=	ENGINEERING RELEASE	GGG	1/11/02	CZS

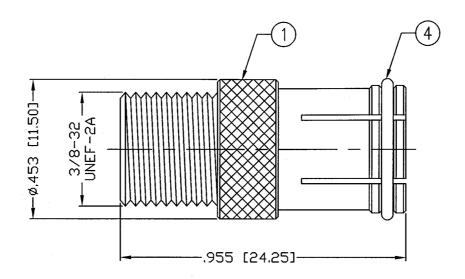

SPECIFICATIONS:

IMPEDANCE: 75 Ohms

1 BODY 2 PIN 3 INSULATOR 4 SPRING 5	1 BRASS 1 BRASS 1 PVC 1 SK-5	NICKEL, 100 μ" TIN NICKEL, 100 μ"		UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX. 3. CHAMFER 1ST & LAST THREADS 45' 4. SURFACE ROUGHNESS 63 FINISH MIL—STD—10 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.L.R.	7610 MIRAMAR RD SAN DIEGO,CA 92126 (858) 549-6340 (858) 549-6345 FAX
7 8 9			DRAWN G. GALLEGOS 1/111/02	6. ALL DIMENSIONS ARE AFTER PLATING. DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	F PLUG QUICK DISCONECT TO F JACK
11 12 13 14 # DESC.	QTY MATRL	FINISH	ORJ DRAWN G. GÁLLEGOS 1/11/02 APPROVALS DATE	TOLERANCES ARE: DECIMALS DIAMETER	SIZE CABLE GROUP DWG NO. REV RFF-1445-5 REV SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1