







ENVELOPE / ASSEMBLY DRAWING

000360

SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	6/1/00	J. D. McR.

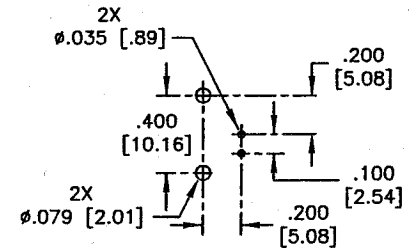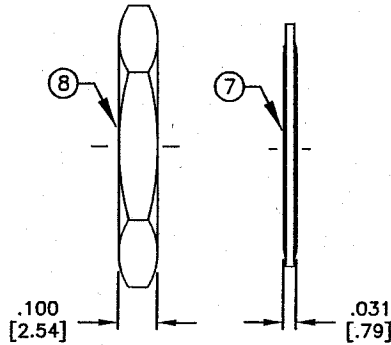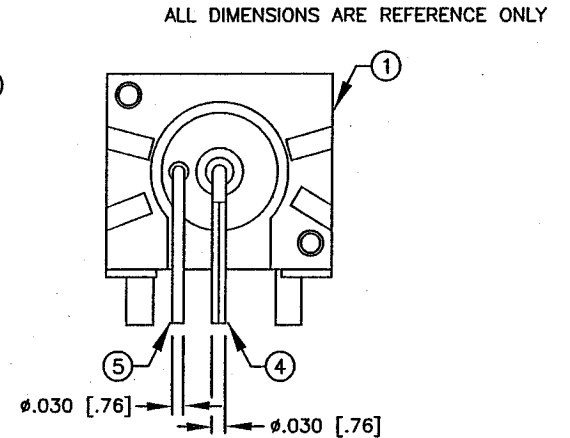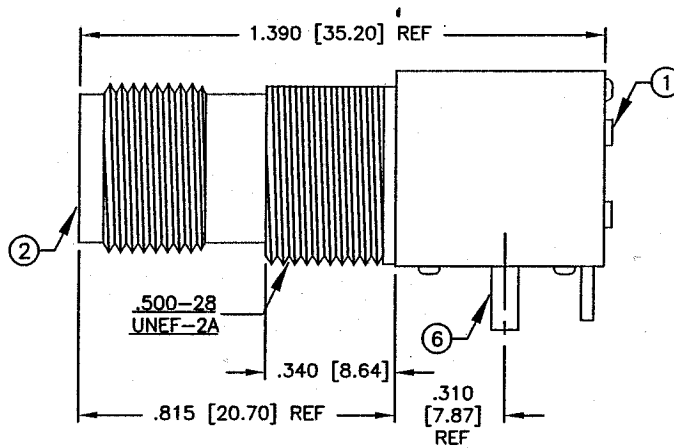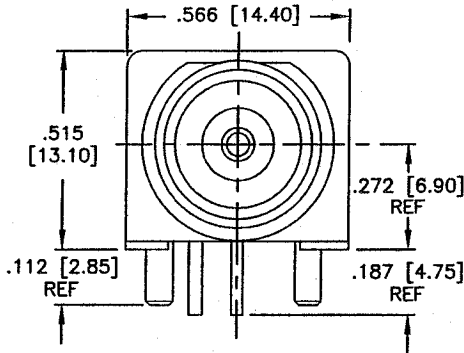

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 500 VOLTS RMS
 FREQUENCY RANGE: 0-3 GHz
 INTERFACE PER MIL-STD-348, SECTION 313.2
 * CONTACT GOLD PLATING AT TNC END - TIN/LEAD PLATING AT CIRCUIT BOARD END

SUGGESTED MOUNTING CONFIGURATION

SCALE 1:1

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DECIMALS DIAMETER

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

RFT-1209-W

TNC FEMALE RIGHT ANGLE, LOW PROFILE, PCB MOUNT

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
8	HEX NUT	1	BRASS	NICKEL
7	LOCK WASHER	1	BRASS	NICKEL
6	POST LEG	2	BRASS	NICKEL
5	GROUND LEAD	1	BRASS	SOLDER TIN
4	SOCKET CONTACT	1	BRASS	*
3	DIELECTRIC	1	POLYPROPYLENE	NONE
2	BODY	1	BRASS	NICKEL
1	BODY	1	VALOX [PBT]	WHITE

DRAWN C. ZUNIGA	6/1/00
CHECKED <i>[Signature]</i>	6-1-00
ORJ DRAWN C. ZUNIGA	6/1/00
APPROVALS	DATE

SIZE A	CABLE GROUP N/A	DWG NO. RFT1209W	REV -
SCALE: 2:1		CAD FILE	SHEET 1 OF 1