
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

| PAR | RHV-134 | | | |
|-----|---------------------|-----|---------|----------|
| REV | DESCRIPTION | DWN | DATE | APPROVED |
| _ | ENGINEERING RELEASE | czs | 8/22/96 | JDMc |
| | | | | |

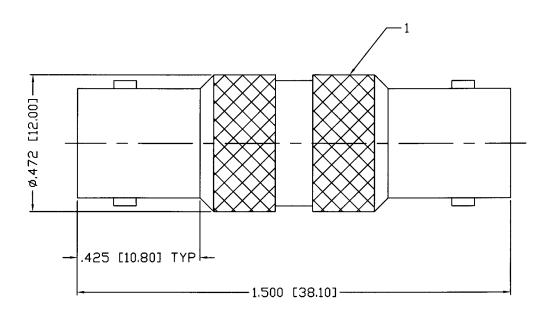

SPECIFICATIONS:

IMPEDANCE: Non-Constant

WORKING VOLTAGE: 5K V rms @ sea level TEMPERATURE RANGE: -65°C TO 165°C INSULATION RESISTANCE: 5k M Ohms min.

| 1 BODY 2 INSULATOR 3 CONTACT 4 SLEEVE 5 | 2 PTFE 1 BRASS | NICKEL, $100\mu^{"}$ GOLD, $30\mu^{"}$ NICKEL, $100\mu^{"}$ | | 3. CHAMFER 1ST & LAS | S & EDGES .005 R. MAX. ST THREADS 45° S 63 FINISH MIL-STD-10 | | | OMMAGÜOLE DE RE INDUSTRIES, L | (858) 549-634 | 92126 10 |
|---|-------------------|---|---|---|--|----------|------|----------------------------------|---------------|-------------|
| 7 8 9 | | | DRAWN 11/7/01 | CONCENTRIC WITHIN 6. ALL DIMENSIONS ARE DIMENSIONS AND [MILLIME | .002 T.I.R. E AFTER PLATING. ARE IN INCHES ETERS] | M | HV J | JACK TO |) JACK | , |
| 11 12 13 14 # DESCRIPTION | QTY MATERIAL | FINISH | CHECKED ON 1-7-OL ORJ DRAWN C. ZUNIGA 11/7/01 APPROVALS DATE | UNLESS OFF TOLERANCES DECIMALS .XXX±.003 [.08] .XX±.005 [.13] | ERWISE NOTED ARE: DIAMETER .XXX±.001 [.03] .XX±.003 [.08] | SIZE CAB | NTS | A DWG NO. RHV CAD FILE OUTLINE | -134 RE | EV OF 1 |