





THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,  
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED  
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.  
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PART NO.

**RMX-9060-1B**

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	6/22/02	JDMc
A	UPDATED DWG. FORMAT & SPECS	CZS	05/27/03	JDMc

ALL DIMENSIONS ARE REFERENCE ONLY

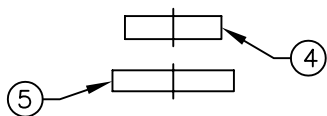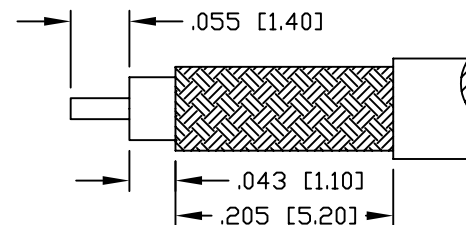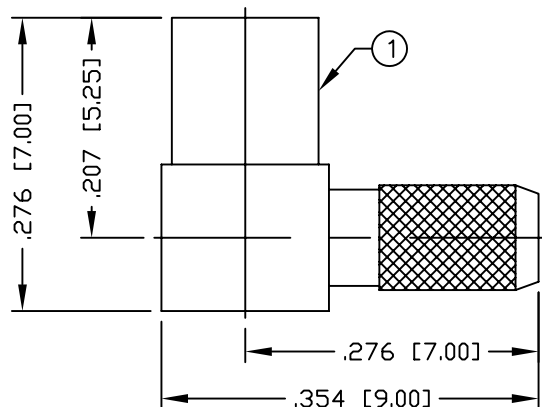

RECOMMENDED CRIMP DIE: .130"

RECOMMENDED STRIPPING DIMENSIONS

NOTE: ATTACH CABLE TO CONNECTOR BY SOLDERING  
 THE CABLE INNER CONDUCTOR TO THE  
 CONTACT SLOT INSIDE THE CONNECTOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-6 GHz  
 WORKING VOLTAGE: 170 V rms @ sea level  
 TEMPERATURE RANGE: -65°C TO 165°C  
 INSULATION RESISTANCE: 1k M Ohms min.  
 FOR RG-174, 188, 188A, 316/U, ALPHA 9174, 9316,  
 BELDEN 8216, 83269, 83284, 84316 & TIMES LMR-100A CABLE

14					
13					
12					
11					
10					
9					
8					
7					
6	FERRULE	1	COPPER	GOLD, 3μ"	
5	COVER	1	BRASS	GOLD, 3μ"	
4	INSULATOR	1	PTFE	---	
3	CONTACT	1	Be.Cu.	GOLD, 30μ"	
2	INSULATOR	1	PTFE	---	
1	BODY	1	BRASS	GOLD, 3μ"	
#	DESCRIPTION	QTY	MATERIAL	FINISH	DATE

008974	
DRAWN C. ZUNIGA	01/21/08
CHECKED	
ORJ DRAWN C. ZUNIGA	07/02/02
APPROVALS	DATE

**RoHS  
COMPLIANT**

DIMENSIONS ARE IN INCHES  
 AND [MILLIMETERS]  
 UNLESS OTHERWISE NOTED  
 TOLERANCES ARE:  
 DECIMALS | DIAMETER

**RF connectors**  
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

**MMCX JACK, CRIMP**

RIGHT ANGLE

SIZE A	CABLE GROUP B	DWG NO. RMX-9060-1B	REV A
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1