




THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.


ALL DIMENSIONS ARE REFERENCE ONLY

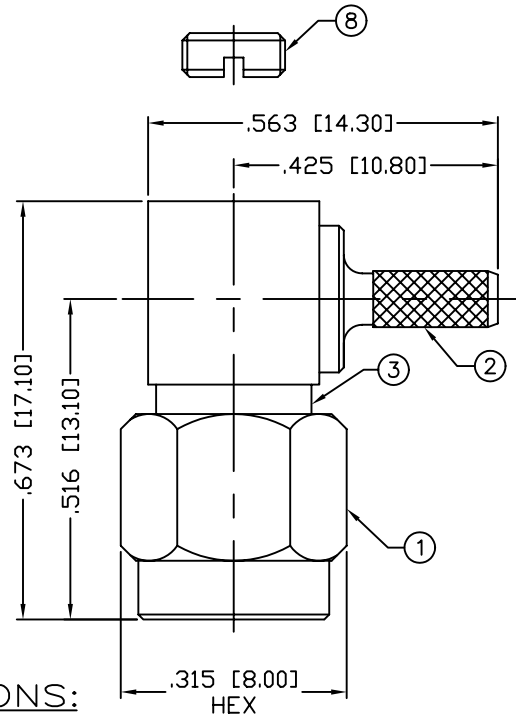

RECOMMENDED CRIMP DIE: .130"

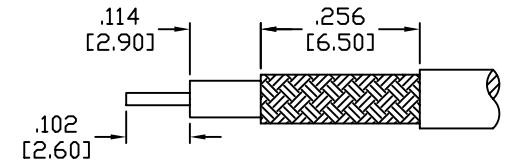

RECOMMENDED STRIPPING DIMENSIONS

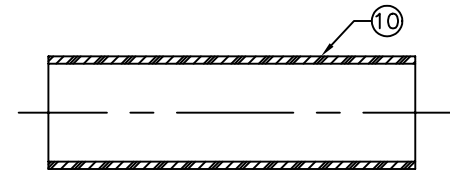

NOTE: ATTACH CABLE TO CONNECTOR BY
 SOLDERING THE CABLE INNER CONDUCTOR
 TO THE PIN SLOT INSIDE THE CONNECTOR

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-12.4 GHz
 INSERTION LOSS(dB): $0.07 \times \sqrt{f(\text{GHz})}$
 VSWR: 1.3 MAX.
 WORKING VOLTAGE: 375 V rms Max. @ Sea Level
 INSULATION RESISTANCE: 5k M Ohms min.
 TEMPERATURE RANGE: -65°C TO 85°C
 FOR RG-174, 188, 188A, 316/U, ALPHA 9174, 9316,
 BELDEN 8216, 83269, 83284, 84316 & TIMES LMR-100A CABLE

1	SHELL	1	BRASS	NICKEL, 100 μ"	008974	
2	BODY	1	BRASS	NICKEL, 100 μ"		
3	SMA BODY	1	BRASS	NICKEL, 100 μ"		
4	INSULATOR	1	PTFE	---		
5	PIN	1	BRASS	GOLD, 50 μ"		
6	RETAINING RING	1	Be. Cu.	---		
7	GASKET	1	SILICONE	---		
8	COVER	1	BRASS	NICKEL, 100 μ"		
9	FERRULE	1	COPPER	NICKEL, 100 μ"		
10	TUBING	1	HEAT SHRINK	---		
11						DRAWN C. ZUNIGA
12						CHECKED
13						ORJ DRAWN K. MAXWELL
14						3/9/94
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED
 TOLERANCES ARE:

DECIMALS	DIAMETER
----------	----------

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

SMA PLUG, CRIMP

RIGHT ANGLE

SIZE A	CABLE GROUP B	DWG NO. RSA-3010-B	REV D
-----------	------------------	-----------------------	----------

SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1

PART NO. RSA-3010-B				
REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	KMM	3/9/94	C. JONES
B	ADD STRIPPING INST	KMM	1/16/96	R. RICE
C	ADD FERRULE & FERRULE STUD ID DIMS	KMM	8/21/96	R. RICE
D	UPDATE DWG & TITLE BLOCK	CZS	4/7/05	JDMc