


ENVELOPE / ASSEMBLY DRAWING

000000

SPECIFICATION CONTROL DRAWING		REV	DESCRIPTION	DWN	DATE	APPROVED
		A	ENGINEERING RELEASE	CZS	5/29/98	R. RICE

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

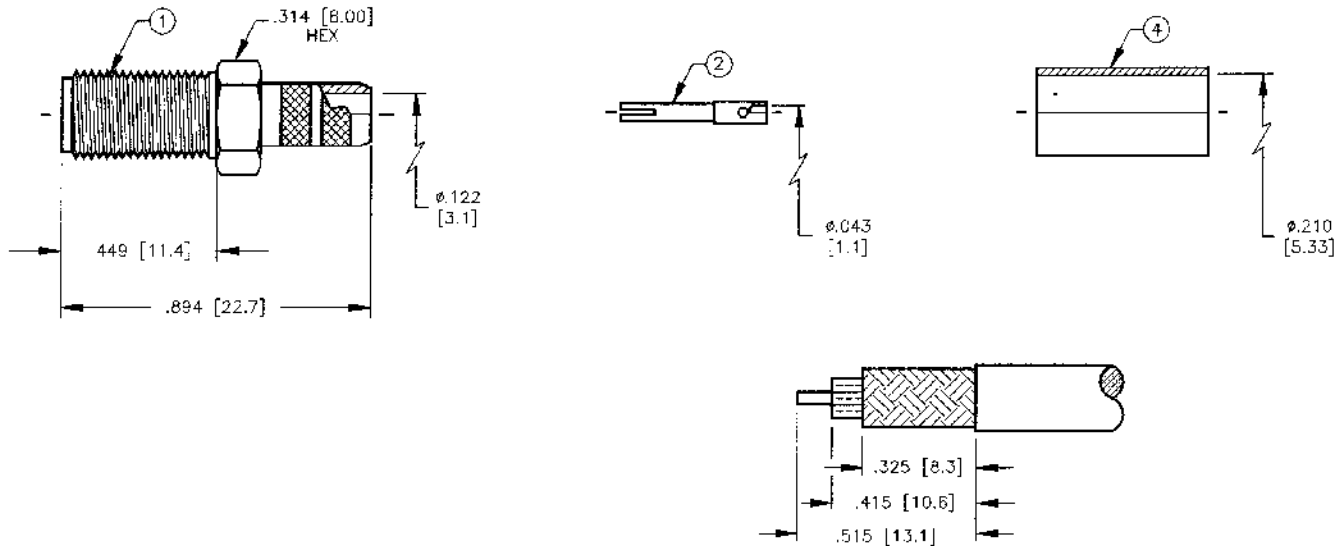

SUGGESTED STRIPPING INSTRUCTIONS

RECOMMENDED CRIMP DIE: .213

CONTACT TO BE SOLDERED

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 3/5 PEAK @ SEA LEVEL
 FREQUENCY RANGE: 0-12.4 GHz
 INSERTION LOSS: ≤ -2 dB @ 6 GHz
 VSWR MAX: 1.3:1
 FOR RG-58, 58A, 58C, 141, 141A, 400/U, BELDEN 8240, 8259, 8262, 9201, 9203, 9310, 9311, COMM/SCOPE 0268 & CUSH-CRAFT ULTRALINK TL92463E INTERFACE PER MIL-STD-348A, SECTION 310.2

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TO ORANGE'S ARE:

DECIMALS DIAMETER

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (619) 549-6340
 (619) 549-6345 FAX

RSA-3050-1-C

SMA FEMALE CRIMP JACK

4	FERRULE	1	COPPER	GOLD
3	DIELECTRIC	1	TEFLON	NONE
2	CONTACT	1	BeCu	GOLD
1	BODY	1	BRASS	GOLD

DRAWN	C. ZUNIGA	5/29/98
CHECKED	<i>[Signature]</i>	6/2/98
CR'D DRAWN	C. ZUNIGA	5/29/98
APPROVALS		DATE

SIZE	CABLE GROUP	DWG NO.	REV
A	C	8925	A
SCALE: 2:1		CAD FILE 13ARC B	SHEET 1 OF 1