
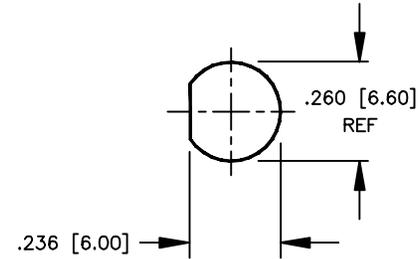


# SPECIFICATION CONTROL DRAWING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	WMD	6/13/95	R. RICE
B	ADD ELEC SPECS	KMM	9/5/96	R. RICE

008974

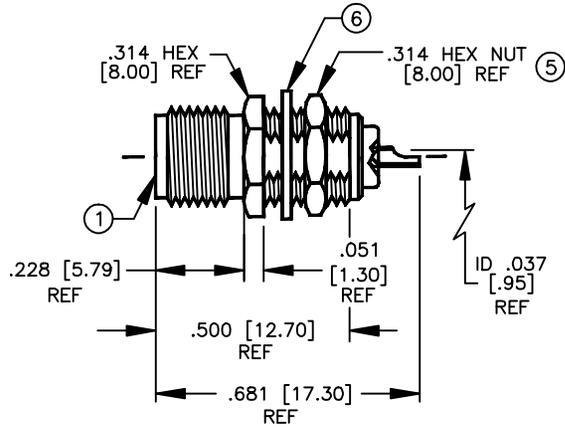

RECOMMENDED MOUNTING HOLE  
.126 [3.20] MAX PANEL THICKNESS

## SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
WORKING VOLTAGE: 335 VRMS @ SEA LEVEL  
FREQUENCY RANGE: 0-12.4 GHZ

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS DIAMETER

ITEM	DESCRIPTION	QTY	MATERIAL	FINISH
6	LOCK WASHER [LKW-250]	1	BRASS	NICKEL
5	HEX NUT [HEX-250-36S]	1	BRASS	NICKEL
4	DIELECTRIC	1	PTFE	NONE
3	DIELECTRIC	1	PTFE	NONE
2	PIN	1	BeCu	GOLD
1	BODY	1	BRASS	NICKEL

DRAWN K. MAXWELL	9/5/96
CHECKED	
ORJ DRAWN K. MAXWELL	6/13/95
APPROVALS	DATE

**RFconnectors**  
DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD  
SAN DIEGO, CA 92126  
(619)549-6340  
(619)549-6345 FAX

## RSA-3250

SMA FEMALE BULKHEAD, SOLDER, FRONT MOUNT

SIZE A	CABLE GROUP N/A	DWG NO. 8519	REV B
SCALE: 2:1	CAD FILE 13ARC B	SHEET 1 OF 1	