

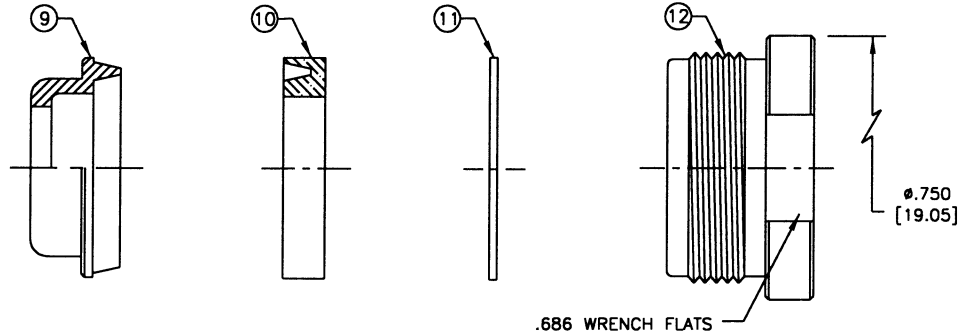



THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.		RT-1200-1		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	11/4/03	JDMc

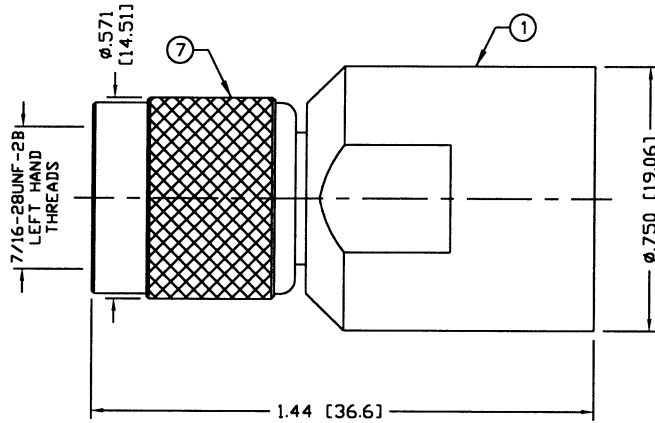

RECOMMENDED CRIMP DIE: .128"

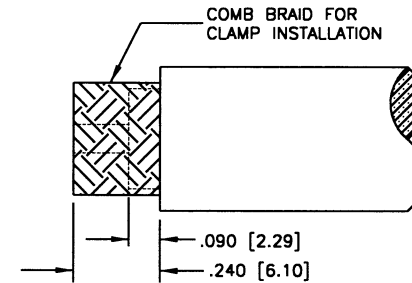

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-7 GHz
 WORKING VOLTAGE: 500 V rms @ sea level
 INSULATION RESISTANCE: 5k M ohms min.
 TEMPERATURE RANGE: -65°C TO +85°C
 FOR BELDEN 8214, 9913, 9913F, 9914, RG-8/U TYPE,
 CAROL C1180, TIMES AA-5886 & LMR-400 CABLE

1	BODY	1	BRASS	SILVER, 80 μ"	000000	UNLESS OTHERWISE SPECIFIED:
2	PIN	1	BRASS	GOLD, 30 μ"		
3	INSULATOR	1	PTFE	---		
4	GASKET	1	RUBBER	---		
5	LOCK WASHER	1	BRASS	SILVER, 80 μ"		
6	RETAINING RING	1	BRASS	---		
7	SHELL	1	BRASS	SILVER, 80 μ"		
8	PRESS WASHER	1	BRASS	SILVER, 80 μ"		
9	CLAMP	1	BRASS	SILVER, 80 μ"		
10	GASKET	1	RUBBER	---		
11	WASHER	1	BRASS	SILVER, 80 μ"		
12	BACK NUT	1	BRASS	SILVER, 80 μ"		
13						
14						
#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE

DRAWN
C. ZUNIGA 11/4/03
 CHECKED
C. ZUNIGA 11/4/03
 ORJ DRAWN
C. ZUNIGA 11/4/03

DECIMALS DIAMETER

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

UNLESS OTHERWISE NOTED
 TOLERANCES ARE:

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

TNC PLUG, CLAMP

REVERSE THREAD

SIZE A	CABLE GROUP 1	DWG NO. RT-1200-1	REV -
SCALE: NTS		CAD FILE OUTLINE	SHEET 1 OF 1