

Two Way Power Splitter

7-16 DIN Female, 698-2700MHz

RFPS-2C-DF

Low PIM

Low VSWR

Other Configurations Available

50 Ohms Impedance

RoHS Compliant

IP67 Rated



GENERAL SPECIFICATIONS

Device Type	Power Splitter
Interface	7-16 DIN Female
Color	Black
Weight.....	2.1 lb
Dimensions.....	9.1" L x 3.2" W x 1.5" H
Bracket Included.....	No

ELECTRICAL SPECIFICATIONS


Operation Frequency Band.....	698-2700 MHz
3rd Intermodulation	≤ -155 dBc min (relative to carrier)
3rd Intermodulation Test Method.....	Two +43 dBm carriers
Average Power	500 Watt
Impedance	50Ω
Insertion Loss	<0.1dB@698-2700 MHz
Peak Power	3Kw
Split Loss	3dB
VSWR.....	≤ 1.20

MECHANICAL SPECIFICATIONS

Inner Contact Plating.....	Silver
Outer Plating.....	White Bronze (Tri-Metal)

ENVIRONMENTAL SPECIFICATIONS

Application	Indoor/Outdoor
Operating Temperature.....	-30°C ~ +75°C; -22°F ~ +167°F
Relative Humidity	Up to 100%
Regulatory Compliance / Certifications.....	RoHS / IP67

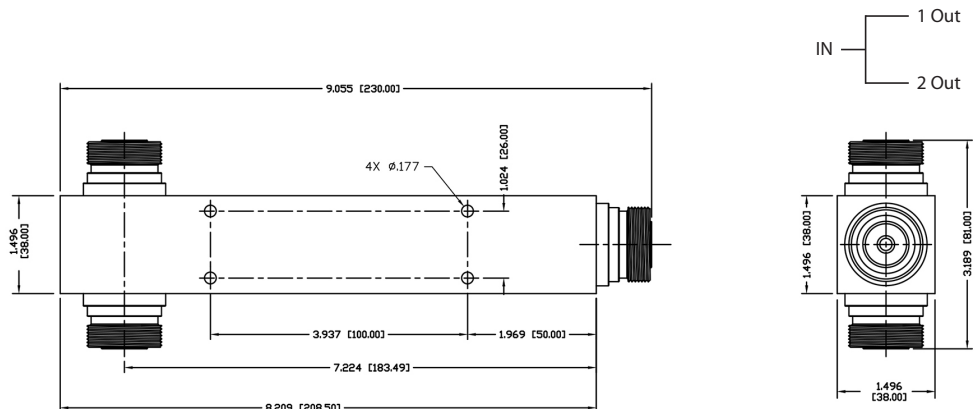

RF Industries

(NASDAQ: RFIIL)

7610 Miramar Road
San Diego, CA 92126

(800) 233-1728

(858) 549-6340

Fax: (858) 549-6345

rfi@rfindustries.com

www.rfindustries.com